

FEDPRO™

TRUSTED BRANDS SINCE 1915



DISTRIBUTOR CATALOG 2020

SINCE 1915



FEDERAL PROCESS
CORPORATION

Located and manufactured in Cleveland, Ohio, FedPro™, formerly known as Gasoila Chemicals, is a division of Federal Process Corporation. Since first introducing Gasoila® Hard-Set thread sealant in 1915, the FedPro division has grown to include a diversified portfolio of trusted, leading products including thread sealants, premium cleaners, lubricants, and more.





FEDPRO
TRUSTED BRANDS SINCE 1915

THE FEDPRO DIFFERENCE

Just as we did over 100 years ago, we proudly manufacture small batches of our products to meet the high quality standards set by our founders and trusted by our customers. Our premium cleaners, thread sealants, PTFE tapes and lubricants have become the products of choice in the petroleum, plumbing, LP gas, automotive, hardware, household and consumer, and general industrial markets.


SOFT-SET Thread Sealant - PTFE



HARD SET Thread Sealant



PLS® 2 Thread & Gasket Sealer

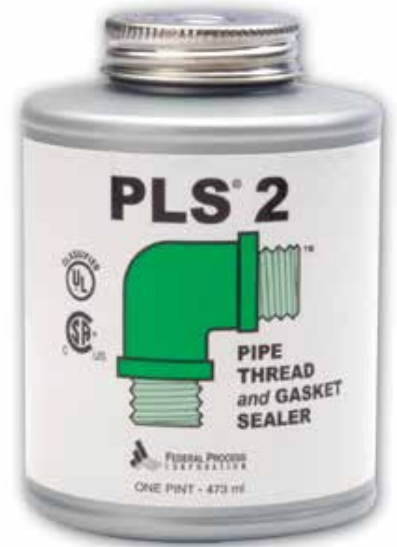

FPC Stock Code	Container Size	Units per Case
SS01	1/8 oz. Tube	100
SS02	2 oz. Tube/Counter Disp.	24
SS04	1/4 pt. Brush	24
SS08	1/2 pt. Brush	24
SS16	1 pt. Brush	12
SS32	1 qt. Flat Top	6
SB32	1 qt. Brush	6
SS28	1 Gallon	2



- Soft-setting, PTFE paste.
- Provides a positive seal on pipe threads, joints, fittings, hoses, nozzles, LPG cylinders, pump assemblies, oil burners, hydraulics, compressors, engines, motors, housings, plugs, fuel lines, couplings and more.
- Use on brass, copper, stainless steel, aluminum, black pipe, tin, galvanized, most plastics and more. Check with plastic pipe manufacturer to determine compatibility with GASOILA® Soft-Set.
- Excellent resistance to gasoline (up to 20% alcohol and petroleum blends), petroleum solvents, kerosene, diesel oil, propane, butane, LPG, cutting oils, ammonia, aliphatic solvents, acids, steam, potable water, compressed air and more. NOT for use with oxygen.
- Remains pliable in cold temperatures.
- Temperature Range: -100°F to 600°F (-75°C to 315°C).
- Pressure Range: To 10,000 PSI (689 bar) sealing liquids; to 3,000 PSI (206 bar) sealing gases.
- One year shelf life when stored at 40°F to 80°F (5°C to 27°C).

FPC Stock Code	Container Size	Units per Case
BT04	1/4 pt. Brush	24
BT08	1/2 pt. Brush	24
BT16	1 pt. Brush	12
FT32	1 qt. Flat Top	6
FT28	1 Gallon	2



- Hard-setting, fast-drying red, varnish sealant.
- Use on brass, copper, stainless steel, aluminum, black pipe, galvanized pipe, rubber, porcelain, wood, marble, epoxy, cork, plexiglass, paper, felt and more.
- NOT for use on plastic
- Excellent resistance to all aliphatic, aromatic, chlorinated solvents; naphtha, benzenes, all petroleum products, refrigerants, propane, butane, kerosene, jet fuel, water, steam and more.
- NOT for use on alcohol content over 20%.
- NOT for use with oxygen.
- Temperature Range: -60°F to 350°F (-51°C to 177°C)
- Pressure Range: To 500 PSI (34 bar) sealing face or butt joints; to 15,000 PSI (1034 bar) for threaded connections.
- Dries to touch within 30 minutes; Do not pressurize until cured, usually 24-48 hours.
- One year shelf life when stored at 40°F to 80°F (5°C to 27°C).
- Flammable.

FPC Stock Code	Container Size	Units per Case
PB04	1/4 pt. Brush	24
PB16	1 pt. Brush	6
PL28	1 Gallon	2



- Textured, non-hardening, opaque gray paste.
- Adheres readily to iron, stainless steel, aluminum, Monel, most plastics and synthetic rubber compounds. Check with plastic pipe manufacturer to determine compatibility with PLS 2.
- For use with dilute acids, aliphatic solvents, ammonia, dilute caustic alkali, diesel fuel, gasoline, kerosene, jet fuel, LPG, natural gas, petroleum solvents, heating oils, butane, hydraulic oils, mineral oils, refrigerants and steam.
- NOT for use with oxygen.
- Brush on to seal pipe joints, plugs, screwed fittings and gasketed connections in steam systems, refineries, gas service, refrigeration systems and chemical plants.
- Temperature Range: -100°F to 600°F (-73°C to 315°C).
- Pressure Range: To 10,000 PSI (689 bar) sealing liquids; to 3,000 PSI (206 bar) sealing gases.
- One year shelf life when stored at 40°F to 80°F (5°C to 27°C).

100 Thread Sealant



E-SEAL Thread Sealant - PTFE



(DEF) Diesel Exhaust Fluid Sealant



FPC Stock Code	Container Size	Units per Case
GH04	1/4 pt. Brush	12
GH08	1/2 pt. Brush	12
GH16	1 pt. Brush	6

FPC Stock Code	Container Size	Units per Case
GE04	1/4 pt. Brush	24
GE08	1/2 pt. Brush	24
GE16	1 pt. Brush	12

FPC Stock Code	Container Size	Units per Case
DE04	1/4 pt. Brush	12



- Firm-setting, viscous, textured, black sealant.
- Excellent performance with systems handling alcohols & ideal for concentrated or dilute acids & caustic alkali, compressed air, aromatic solvents, glycol/water solutions, coal tar, naphtha, cutting oils, ethylene glycol, gasoline and ketones.
- NOT for use with oxygen.
- NOT for use on plastic pipe.
- Temperature Range: -50°F to 450°F (-45°C to 232°C).
- Pressure Range: To 5,000 PSI (344 bar) for gases; to 10,000 PSI (659 bar) for liquids.
- One year shelf life when stored at 40°F to 80°F (5°C to 27°C).

- Non-hardening, opaque, viscous, textured, green paste designed specifically for ethanol blended gasoline including E10 and E85
- Provides a positive seal on pipe threads, joints, fittings, hoses, nozzles, pump assemblies, oil burners, hydraulics, bolts, compressors, engines, motors, fuel lines and couplings.
- For use on brass, copper, stainless steel, aluminum, black pipe, tin & galvanized pipe.
- Excellent resistance to gasoline, ethanol blended gasoline such as E10 and E85, petroleum solvents, kerosene, diesel oil, up to 20% biodiesel, propane, jet fuels, butane, LPG, cutting oils, ammonia, aliphatic solvents, acids, steam and potable water.
- NOT for use with oxygen.
- Temperature Range: -100°F to 600°F (-73°C to 315°C).
- Pressure Range: Up to 10,000 PSI (689 bar) when sealing liquids & up to 3,000 PSI (206 bar) with gases.
- One year shelf life when stored at 40°F to 80°F (5°C to 27°C).

- DEF (Diesel Exhaust Fluid) Sealant is designed for systems carrying urea-based chemical reactant used in SCR systems.
- Excellent performance with systems handling Diesel Exhaust Fluid.
- NOT for use on plastic pipe.
- NOT for use with oxygen.
- Temperature Range: -50°F to +450°F (-45°C to 232°C).
- Pressure Range: Up to 10,000 PSI (689 bar) when sealing liquids and up to 5,000 PSI (344 bar) with gases.
- One year shelf life when stored at 40°F to 80°F (5°C to 27°C).

JC-30® High-Fill Thread Sealant - PTFE



FPC Stock Code	Container Size	Units per Case
JC04	1/4 pt. Brush	24
JC16	1 pt. Brush	12

- High viscosity, heavy-duty, PTFE thread sealant.
- Ideal for use on worn, damaged or irregular threads.
- Provides excellent chemical resistance in use with water, steam, corrosives, acids, petroleum products, hydraulic fluids, cryogenics, jet fuel, CNG, LP and natural gas.
- NOT for use with oxygen.
- Forms a protective coating for movable surfaces exposed to high humidity.
- Temperature Range: -100°F to 600°F (-73°C to 315°C).
- Pressure Range: To 10,000 PSI (689 bar) for liquids; 2,000 PSI (138 bar) for gases.
- One year shelf life when stored at 40°F to 80°F (5°C to 27°C).

NT - NON-PTFE Thread Sealant



FPC Stock Code	Container Size	Units per Case
NT08	1/2 pt. Brush	24
NT16	1 pt. Brush	12



- Blue, textured, non-PTFE, thread sealant.
- Use on most metals and plastics. Check with plastic pipe manufacturer to determine compatibility with GASOILA® NT.
- Recommended for use with valves, fittings, hoses, nozzles, motors, housings, gaskets, compressors, castings, etc.
- Use with potable water.
- NOT for use with oxygen.
- Temperature Range: -50°F to 400°F (-45°C to 204°C).
- Pressure Range: To 10,000 PSI (689 bar) sealing liquids; 3,000 PSI (206 bar) sealing gases.
- One year shelf life when stored at 40°F to 80°F (5°C to 27°C).

FasSeal ATS® Anaerobic - PTFE



FPC Stock Code	Container Size	Units per Case
AS05	50 ml Tube	10
AS25	250 ml Tube	10

- Forms a tough, insoluble, vibration-proof seal.
- Allows for easy disassembly of parts when required.
- High-speed curing time without shrinkage and resists galling and seizing.
- For use on inactive metals as well as conventional materials.
- Resistant to petroleum, butane, propane, natural gas, water, steam, refrigerants, chlorine, acids, oils, gasoline and more.
- NOT for use with oxygen.
- Recommended for air conditioning lines, hydraulic and pneumatic lines, air compressor hoses, plated flare fittings, sprinkler installations, housings, plugs, pipe threads, fuel lines, steam lines, natural gas lines.
- Temperature Range:
-65°F to 375°F (-54°C to 191°C).
- Pressure Range: Seals to 10,000 PSI (689 bar) after application and then to the bursting strength of the pipe after curing.
- One year shelf life when stored at 40°F to 80°F (5°C to 27°C).

Zip Joint® Rope Gasket Maker - PTFE



FPC Stock Code	Container Size	Units per Case
ZJ11	3/32" Dia. x 25' Coil	6
ZJ12	3/32" Dia. x 50' Coil	6
ZJ13	5/32" Dia. x 25' Coil	6

- Ideal for packing valves and faucets.
- Quickly makes any gasket.
- Simple and clean installation.
- Spreads under compression to conform to odd shapes.
- PTFE sealing agent withstands vibration.
- Unique package allows for easy dispensing and storage.
- Temperature Range:
-400°F to 500°F (-240°C to 260°C).
- Pressure Range:
To 500 PSI (34 bar) under general use.

GASOILA® PTFE Tapes - Industrial Strength



**Thred Tape
High Density**

**Thred Tape
Medium Density**

**Thred Tape SD
Standard Density**

**Economy Tape
Low Density**

FPC Stock Code	Container Size	Units per Case
TT23	3/4" x 288"	24
TT33	3/4" x 576"	24
TT38	3/8" x 520"	144
TT40	1/2" x 260"	144
TT41	1/2" x 520"	144
TT42	1/4" x 520"	144
TT43	1/4" x 260"	144
TT44	1/2" x 1296"	144

FPC Stock Code	Container Size	Units per Case
TT53	3/4" x 260"	24
TT54	3/4" x 520"	24
TT60	1/2" x 260"	144
TT61	1/2" x 520"	144

FPC Stock Code	Container Size	Units per Case
ZT12	3/4" x 260"	100
ZT13	3/4" x 500"	100
ZT15	3/4" x 520"	100
ZT20	1/2" x 260"	144
ZT21	1/2" x 520"	144
ZT44	1/2" x 1296"	144
ZT51	1" x 520"	100
ZT60	2" x 260"	144

FPC Stock Code	Container Size	Units per Case
1901B	1/2" x 1296"	100
1901C	1/2" x 260"	100
1901D	1/2" x 520"	100
1901E	3/4" x 520"	100
1901F	1" x 520"	50
1901G	1" x 1296"	140
1901H	3/4" x 260"	140

Density Type	HD High	MD Medium	SD Standard
Thickness (mils)	3.9	3.5	3.5
Tensile (Min psi)	800	800	800
UL Listed	Yes	No	No
MIL SPEC*	AA-58092	AA-58092	AA-58092
MIL SPEC*	27730A	27730A	27730A
Density (g/cm3)	.9 - 1.2	.65 - .9	.45 - .7
Elongation (%)	50	50	N/A
Temp. Range (°F)	-450 to +550	-450 to +550	-450 to +550
Shelf Life	Indefinite	Indefinite	Indefinite

*Meets Performance Requirements of Mil Specifications Listed.

PTFE TAPE SPECIFICATIONS

Meets Mil Spec
MIL-T-27730-A or AA-58092.
(Except Low Density Economy Tape).

- Made with 100% virgin PTFE.
- Can be used with oxygen.

GASOILA® PTFE Tapes - Specialty Series



**For Oxygen
Green**



**For Gas
Yellow**



**For H2O
Pink**



**For Stainless Steel
Nickel**

FPC Stock Code	Container Size	Units per Case
GT90-24	1/2" x 260"	24
GT90	1/2" x 260"	144

- Designed for sealing oxygen based lines.
- Use on all types threaded connections.
- UL® Listed thread sealant
- Meets Mil Spec MIL-AA-58092.

FPC Stock Code	Container Size	Units per Case
YT70-24	1/2" x 260"	24
YT70	1/2" x 260"	144
YT71	1/2" x 520"	100
YT75	1" x 520"	100

- Designed for chemical installations and sealing lines carrying natural gas, propane, butane and oil.
- Use on all types of threaded connections.
- CSA® approved. UL® Listed thread sealant
- Meets MIL Spec MIL-AA-58092.

FPC Stock Code	Container Size	Units per Case
PT80-24	1/2" x 260"	24
PT80	1/2" x 260"	144

- Designed for sealing water and/or steam lines.
- Use on all types of threaded connections.
- UL® Listed thread sealant
- Meets Mil Spec MIL-AA-58092.

FPC Stock Code	Container Size	Units per Case
SA26	1/2" x 260"	40
SA26-34	3/4" x 260"	40
SA520-1	1" x 520"	40
SA260-1	1" x 260"	40
SA60	1/2" x 600"	50

- Thread Sealing Tape
- Designed for use on difficult service conditions associated with stainless steel, aluminum & brass threaded connections.
- Helps prevent seizing and galling.
- NOT for use with oxygen.
- UL® Listed thread sealant
- Meets Mil Spec MIL-T-27730A.

	Yellow	Pink/Green	Stainless
Density Type	High	High	High
Thickness (mils)	3.8	3.7	4.3
Tensile (Min psi)	1600	1600	1000
UL Listed	Yes	Yes	Yes
MIL SPEC*	AA-58092	AA-58092	T-2773
MIL SPEC*	27730A	27730A	27730A
Density (g/cm3)	1.05 - 1.3	1.05 - 1.3	1.05 - 1.3
Elongation (%)	75	75	75
Temp. Range (°F)	-450 to +550	-450 to +550	-450 to +550
Shelf Life	Indefinite	Indefinite	Indefinite

*Meets Performance Requirements of Mil Specifications Listed.

PTFE TAPE SPECIFICATIONS

FEDPRO™
TRUSTED BRANDS SINCE 1915

orders@federalprocess.com

Phone: 216-464-6440 | Fax: 216-464-2080 9

Thred Gard® Anti-Seize Compounds



General Purpose

FPC Stock Code	Container Size	Units per Case
TG04	1/4 lb. Brush	24
TG08	1/2 lb. Brush	12
TG16	1 lb. Brush	12

Copper Based

FPC Stock Code	Container Size	Units per Case
CG04	1/4 lb. Brush	24
CG08	1/2 lb. Brush	12
CG16	1 lb. Brush	12

Nickel Based

FPC Stock Code	Container Size	Units per Case
NG04	1/4 lb. Brush	24
NG08	1/2 lb. Brush	12
NG16	1 lb. Brush	12

- Provides protection against seizing, galling, rust and corrosion at three high-temperature levels.

- Brush on nuts, bolts, screws, bushings, cam rollers, shafts, sleeves, couplings, conveyers, motors, pumps, turbines and valves etc.

- Speeds assembly and facilitates disassembly.

- Industry applications include steelmills, forges, foundries, die casters, refining and chemical installations, marine services, farm and construction equipment, power and utility plants, paper and pulp mills and general plant maintenance.

- Non-hardening, non-dripping.

- Exceeds MIL Spec MIL-A-907D.

THREDGARD®
Anti - Seize Compound

Gasoila® Thread Cutting Oil



Dark Cutting Oil

FPC Stock Code	Container Size	Units per Case
WD32	1 Quart	12
WD28	1 Gallon	4

- DARK Cutting Oil - medium viscosity, mineral type oil with sulphur and lard; ideal for cutting threads in steel pipe, bolts and rods.

- Premium-grade cutting oils extend die life by cleaning threads, dissipating heat and reducing friction.

- Use DARK Cutting Oil on non-ferrous metals when staining isn't critical.

- Products contain NO chlorine or other halogens, PCBs or heavy metals.

Light Cutting Oil

FPC Stock Code	Container Size	Units per Case
WL32	1 Quart	12
WL28	1 Gallon	4

- LIGHT Cutting Oil - non-staining, translucent, low-odor oil that provides protection under heavy loads and high speeds.

- Premium-grade cutting oils extend die life by cleaning threads, dissipating heat and reducing friction.

- Products contain NO chlorine or other halogens, PCBs or heavy metals.

Gasoila® Gas Gauging Paste



FPC Stock Code	Container Size	Units per Case
GG25	2.5 oz. Jar	24



- Indicates level of gasoline, naphtha, kerosene, crude and refined oils, jet fuels and a range of other commonly stored liquids.

- Paste will turn blue upon contact with gasoline.

GASOILA®

Gasoil® All Purpose Water Finding Paste



- AP02 packed in color counter display.

FPC Stock Code	Container Size	Units per Case
AP02	2 oz. Tube	24



- Full color instruction sheet included in every box.



- Driver-friendly flip cap

- Fast, reliable way to detect water in fuel storage tanks.
- Accurately detects phase separation in ethanol blend applications.
- For all petroleum fuels including blends up to 20% ethanol, diesel, kerosene, #2 Oil, JP-4, JP-5 and more.
- Works in seconds.
- Paste will turn yellow-green upon contact with water.
- User-friendly flip cap.
- Plastic tube, less mess than metal tubes.

Gasoil® Regular Water Finding Paste



- Driver-friendly flip cap

FPC Stock Code	Container Size	Units per Case
WF25	2.5 oz. Jar	24
WT25	2.5 oz. Tube	24



- WT25 packed in color counter display.

- Reformulated for better consistency and improved color change.
- Quickly and accurately detects water in fuel storage tanks.
- Mustard yellow paste will turn red upon contact with water.
- Effective with gasoline, diesel or other hydrocarbon products, sulphuric, nitric and hydrochloric acids, ammonia, soap solutions and other chloride solutions.
- User-friendly flip cap.
- User-friendly plastic tube, less mess than metal tubes.

Free All® Deep Penetrating Oil



✓
**SILICONE
FREE**

FPC Stock Code	Container Size	Units per Case
RE01	1.5 oz. Aerosol	12
RE06	6 oz. Aerosol	12
RE12	11oz. Aerosol	12
FS16	14 oz. Liquid	12
FA28	1 Gallon	4
FA55	55 Gallon Drum	1
RE12-DC	11 oz. Counter Display	12
RE12-STK	11 oz. Stack Display	60

- Free All® spreads deep into rusted or frozen parts, freeing them with ease.
- Penetrates rust, scale and corrosion to free parts and assemblies.
- Loosens tar, grease, carbon and graphite deposits.
- Specially formulated rust eating agent is ideal for plumbing, automotive, marine and general industrial applications.
- Will free up threaded pipe connections, rusted machine screws, bolts, nuts, clamps for mufflers and tail pipes, pillow blocks, universal joints, locks, etc.
- Contains NO silicones, making it safe for use in paint and body shop environments.

 **WARNING: Cancer and Reproductive Harm**
www.P65Warnings.ca.gov



RE12-STK



RE12-DC

FREE ALL
DEEP PENETRATING OIL

Lube-It All® Deep Lubricating Oil



✓
**SILICONE
FREE**

FPC Stock Code	Container Size	Units per Case
LA01	1.5 oz. Aerosol	12
LA06	6 oz. Aerosol	12
LA12	11 oz. Aerosol	12

**DEEP
LUBRICATING
OIL**

- Contains Molybdenum disulphide and graphite for superior lubricating performance.
- Silicone free.
- Forms a thin lubricant coating to reduce friction.
- Displaces water on surfaces and repels moisture to prevent corrosion.
- Penetrates through fine gaps to deliver a coating to assembled parts and obstructed surfaces.
- Can be used on metal and plastic surfaces, rotating parts and gears.
- Temperature Range:
-30°F to 350°F (-34°C to 177°C).

LUBE-IT ALL
DEEP LUBRICATING OIL

Lube-It All® Multi Purpose Lubricant



✓
**SILICONE
FREE**

Lube-It All® Multi Purpose Silicone Lubricant



**15%
SILICONE**

Lube-It All® White Lithium Grease



✓
**SILICONE
FREE**

FPC Stock Code	Container Size	Units per Case
LA450	12 oz. Aerosol	12

FOOD GRADE MULTI-USE LUBRICANT

- NSF H1
- Silicone free.
- Economical general-purpose lubricant.
- Penetrates and loosens dirt.
- Safe on styrenes and urethanes.
- Works on paint, metal, plastic and wood.
- Virtually odorless and tackless.
- Temperature Range: -20°F to 500°F (-29°C to 260°C).

FPC Stock Code	Container Size	Units per Case
LA525	11 oz. Aerosol	12

FOOD GRADE SILICONE LUBRICANT

- NSF H1
- Colorless, low viscosity formula.
- 15% silicone.
- Stops sticking without transfer.
- Temperature Range: -40°F to 450°F (-40°C to 232°C).

FPC Stock Code	Container Size	Units per Case
WG16	11 oz. Aerosol	12

LONG-LASTING WHITE LITHIUM GREASE

- High solid, non-staining white lithium grease.
 - 3x thicker*.
 - Clings to vertical surfaces.
 - Effective from -20°F to 275°F (-28°C to 135°C).
 - Use on chains, gears, drives, hinges and other overhead surfaces.
 - Forms a complete coating around moving parts.
 - Protects metal surfaces against rust and wear.
 - Safe on most plastics and painted surfaces.
- *Vs. competitor product.

TUB O' TOWELS®

FPC Stock Code	Container Size	Units per Case
TW90	90 Towel Canister	6
TW40	40 Towel Canister	12
TW01	Single Towel Packs	350
TW01-GR	TW01 Gravity Feed Box	100

Please inquire about our full line of Tub O' Towels counter and floor displays.

90-Count
TUB O' TOWELS - #TW90

10" x 12" extra large heavy duty cleaning wipes are great for use on the job or at home.



40-Count
TUB O' TOWELS - #TW40
A more portable 7" x 8" size wipe with a slim profile for the glove box, tool box or tackle box.



Tub O' Towels® - Heavy Duty Cleaning Wipes




100% SOLUTION SOAKED

Every wipe comes out of the container fully saturated and ready to work hard. Thanks to the unique wicking nature of Tub O' Towels wipes, combined with just the right amount of solution in every canister, wipes are always moist, never dry. Other wipes start drying out before they even hit the shelves.



DURABLE FIBER WEAVE

More scrubbing power for the effort while staying gentle on hands and soft surfaces. A special fiber weave wicks up moisture, enhances scrubbing and grabs dirt. The quilted design offers cushioning and surface texture. Thanks to the combination of the two, dirt's a goner.



OVERSIZED, OVERACHIEVING

Bigger, stronger and tougher by design. Tub O' Towels cleaning wipes are generously sized (10" x 12" in the 90-count tub) and made of a heavy-duty polyfiber blend, not cotton. This means they won't fall apart on the job.



CLEAN WITHOUT THE MEAN

Tub O' Towels provides hard-core cleaning, without the hard-core chemicals. Our high-performance blend of biodegradable detergents and emulsifiers goes to work dissolving grease and dirt, while foaming agents lift it off the surface so it can easily be wiped away.



TOUGH ON DIRT, GENTLE ON HANDS

Our wipes contain aloe, vitamin E and lanolin to protect hands and leave them clean and soft. While designed to clean thousands of surfaces, there's one surface Tub O' Towels cleans especially well - your hands. No matter what you get on them, permanent marker included, Tub O' Towels will take it right off.



VAPORLOCK™ CANISTER

A heavy-gauge plastic tub and locking lid minimize solution evaporation. As much thought went into the Tub O' Towels container as the wipes themselves. The result is a tough plastic tub that prevents evaporation. And a locking lid snaps shut, creating a tight seal.

Tub O' Towels® - Specialty Wipes



Individually Wrapped Single Packs
7" x 8" Tub O' Towel Single Pack



TUB O' TOWELS®

Gravity Feed Box
Single Packs — #TW01-GR

FPC Stock Code	Container Size	Units per Case	FPC Stock Code	Container Size	Units per Case	FPC Stock Code	Container Size	Units per Case
TW40-SS	40 Towel Canister	12	TW40-GR	40 Towel Canister	12	TW40-CP	40 Towel Canister	12
TW01-SS	Single Towel Packs	350	TW01-G	Single Towel Packs	350	TW01-CP	Single Towel Packs	350



- Shines and polishes stainless steel, chrome and other metal surfaces.
- Easily removes greasy fingerprints, watermarks, food, grease, oils and much more.
- No streaks or residues during application.
- Doesn't contain silicones, abrasives or acids.

- Removes grime, grease and more while providing a polished surface.
- Safe for stone surfaces, marble, granite, quartz, travertine, limestone, onyx, Corian®, Formica®, Silestone®, laminate, porcelain, tile, ceramic, fiberglass and any non-porous hard surface countertop.
- Contains Fluoropolymer that repels water and prevents oils from sticking to the stone surface.
- Will not discolor sealed grout.

- Removes the toughest stains through a blend of cleaners designed to clean carpet and upholstery.
- Attacks soils embedded in close-knit fibers of carpet and upholstery.
- Removes pet stains, food stains, grass stains, blood, grease, beverages, latex paint, cosmetics, ink, crayons, shoe polish and other water-based stains.

Tub O' Towels® - On-The-Go Packs

FPC Stock Code	Container Size	Units per Case
TW01-6	6 Pack Pouch	24
TW01-15	15 Pack Pouch	18

- Individually wrapped 10"x12" cleaning wipes (TW01) for on-the-go messes.
- Store in tool chest, glove compartment, bags and more.
- Can be pegged or sit in tray.
- Available in 6-pack or 15-pack.



FEDPRO
TRUSTED BRANDS SINCE 1915

orders@federalprocess.com
Phone: 216-464-6440 | Fax: 216-464-2080

Gasoil® Extreme Temperature Leak Detector



FPC Stock Code	Container Size	Units per Case
LT08	8 oz. w/Dauber	12
LS16	1 pt. Spray Bottle	12
LT28	1 Gallon	4
LT55	55 Gallon Drum	1

- Gasoil® Extreme Temperature Leak Detector is specifically engineered for use on gas lines, gas cylinders, refrigeration condensers, air lines, air pumps or any other system carrying gas.

- Non-corrosive.
- Temperature Range: -10°F to 350°F (-23°C to 177°C).
- NOT for use on oxygen systems.

Tub O' Scrub® Heavy Duty Hand Cleaner



FPC Stock Code	Container Size	Units per Case
TS18	18 oz. Bottle	12
TS64	1/2 Gallon Pump	4
TS28	1 Gallon Pump	4
TS01	0.3 oz Single Pack	350
TS01-GR	Gravity Feed Box	100



NO
Petroleum
Distillates
or Pumice

- Unique Biodegradable Formula
- Removes grease, oil and tough grime without water.
- Walnut shell formula will NOT block drains or septic tank systems.
- Other formulas contain low-cost pumice that can clog drains or septic systems.
- Walnut shells completely sanitized and safe for use.
- Contains NO Petroleum Distillates, which can be harmful to skin, water and septic systems.
- Lotion-Like Formula
- Lanolin, aloe vera, and vitamin E among other emollients that leave hands soft and moisturized after use.

FasMark® Cap & Cover Paint



FPC Stock Code	Container Size	Units per Case
FM15O	15 oz. Orange	12
FM15Y	15 oz. Yellow	12
FM15BR	15 oz. Brown	12
FM15R	15 oz. Red	12
FM15G	15 oz. Green	12
FM15BL	15 oz. Blue	12
FM15BRZ	15 oz. Bronze	12
FM15W	15 oz. White	12
FM15B	15 oz. Black	12

- 15 oz. aerosol
- Permanent, upside down paint
- Spray through cap saves time
- Direct to metal
- Apply to clean, dry surface
- High solid, highly pigmented formula
- Bright long lasting color
- Quick dry formula – 8 to 10 minutes
- VOC compliant

Use On:


- Manhole Covers
- Tank Valves
- Island Forms
- Structural Steel
- Storage Tanks
- Equipment

 **WARNING: Cancer and Reproductive Harm**
www.P65Warnings.ca.gov

WorkSav'r® Stainless Steel Polish



FPC Stock Code	Container Size	Units per Case
SC16	15 oz. Aerosol	12




SILICONE FREE

- Renews stainless steel and chrome surfaces in one application.
- Removes tarnish, residues and oxidation and also leaves a repellent coating.
- Oil emulsion that cleans, polishes and protects
- Silicone Free
- Superior performance vs. water based competitors
- Industrial strength foaming action
- Removes fingerprints

WorkSav'r® EFS Expanding Foam



FPC Stock Code	Container Size	Units per Case
EF12	12 oz. Aerosol Can	12



- Insulates and seals around ducts, pipes, air conditioning units, heating equipment vents and much more.
- Foam dries to the touch in 30 minutes and cures hard in 4 hours.
- Cured product can be trimmed, sanded and painted.
- Resists mildew.
- Perfect for voids.

FEDPRO
TRUSTED BRANDS SINCE 1915

orders@federalprocess.com

Phone: 216-464-6440 | Fax: 216-464-2080




- Tough nylon cable ties.
- Continuous locking threads.
- UV (black) cable ties are ultraviolet resistant for prolonged life.



FPC #	Length Inches	Tensile Strength	Color	Units Per Bag	Bags Per Case
CT04	4	18	Natural	100	10
CB04	4	18	Black	100	10
CT06	6	18	Natural	100	10
CB06	6	18	Black	100	10
CT08-18	8	18	Natural	100	10
CB08-18	8	18	Black	100	10
CB05	5	40	Black	100	10
CT08	8	40	Natural	100	10
CB08-40	8	40	Black	100	10
CT07	7	50	Natural	100	10
CB07	7	50	Black	100	10
CT11	11	50	Natural	100	10
CB11	11	50	Black	100	10
CT14	14	50	Natural	100	10
CB14	14	50	Black	100	10
CT17	17	50	Natural	100	10
CB17	17	50	Black	100	10
CT08-120	8	120	Natural	100	10
CB08-120	8	120	Black	100	10
CT14-120	14	120	Natural	100	10
CB14-120	14	120	Black	100	10
CT18	18	120	Natural	100	10
CB18	18	120	Black	100	10
CT24	24	175	Natural	50	5
CB24	24	175	Black	50	5
CT36	36	175	Natural	50	5
CB36	36	175	Black	50	5
CT48	48	175	Natural	50	5
CB48	48	175	Black	50	5

HOLD IT IN PLACE!

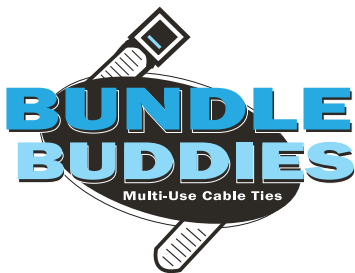

The information is provided solely as a guide. Recommendations are based on a wide variety of customer experience. Always check with plastic pipe manufacturer to determine compatibility.



Soft-Set

- General Purpose, Top-selling Sealant
- Perfect for New Pipes
- Stays Pliable in Cold Temperatures
- Non-Hardening
- Non-Separating

TYPE

Blue Green Paste with PTFE

APPLICATIONS

Water, Steam, Natural Gas, LPG, Propane, Gasoline, Butane
*Not for Use with Oxygen systems

USED BY

- Mechanical Contractors
- Plumbers
- Gas Utilities
- Service Station Installers
- Manufacturing Plants

USED ON

Most Metals & Most Plastics

APPROVALS

CSA, UL NSF 61 NSF 14



E-SEAL

- Specifically for E10 and E85
- Stays Pliable in Cold Temperatures
- Non-Hardening
- Non-Separating

Green Paste with PTFE

Ethanol Blended Gasoline, including E10 and E85 (*NOT 100% Ethanol applications)
*Not for Use with Oxygen systems

- Gas Station Installers

Most Metals

UL



Hard-Set

- Hard Setting Sealant
- Assembles Threaded Joints Permanently
- Excellent for Coating Surfaces
- Impervious to Gasoline
- Flammable

Red Varnish

Aliphatic, Aromatic & Chlorinated Solvents
*Not for Use with Oxygen systems

- Auto Industry to Seal Drive Trains, Coat parts
- Contractors Installing Underground Piping, Steam Systems
- Marine Manufacturers

Most Metals Rubber, Porcelain and Wood

UL



PLS-2

- Ideal for Demanding Pneumatic and LPG Applications

Gray Paste with PTFE

Chlorine, Diesel, Jet Fuel, Steam, Dilute Acid, LPG
*Not for Use with Oxygen systems

- Chemical Plants
- Gas Utilities
- Refineries
- Airlines, Hydraulics
- Tank Trucks

Most Metals & Most Plastics

CSA UL



100

- Ideal for use on Systems with 100% Methanol, Ethanol, Alcohol and Highly Corrosive Chemicals
- Soft Setting

Black Paste

High Concentrations of Alcohol, Solvents, Caustic Chemicals
100% Ethanol
100% Methanol
*Not for Use with Oxygen systems

- Pharmaceutical
- Chemical Companies

Most Metals
*Not for Use on Plastic Pipe



JC-30

- For Damaged, Irregular, and Mis-cut Threads
- Thick Consistency, 10-15% more Solids than Conventional Sealants

Off White Paste with PTFE

Water, Steam, Natural Gas, LPG, Propane, Gasoline, R-22 and Hydraulic Fluids
*Not for Use with Oxygen systems

- Plumbers,
- Gas Utilities
- Manufacturing Plants

Most Metals



NT

- Soft Setting for Applications Requiring Non-PTFE Compound
- For use when Non-PTFE Sealant is Preferred

Bright Blue Paste without PTFE

Water, Steam, LPG, Propane, Gasoline
*Not for Use with Oxygen systems

- Propane Companies
- Petroleum Companies

Most Metals & Most Plastics

NSF 61 NSF 14



FasSealATS

- Anaerobic Thread Sealant that cures in Absence of Oxygen
- Ideal for Refrigeration or other High Vibration Applications

Smooth White Paste with PTFE

Air Conditioning Lines, Hydraulic-Pneumatic Lines, Air Compressor Hoses, Sprinkler Installations
*Not for Use with Oxygen systems

- HVAC
- Refrigeration Companies


Most Metals
*Not for Use on Plastic Pipe

FEDPRO™


TRUSTED BRANDS SINCE 1915



SEALANTS



WIPES



HAND CLEANERS



PENETRANTS



LUBRICANTS



SPECIALTY