



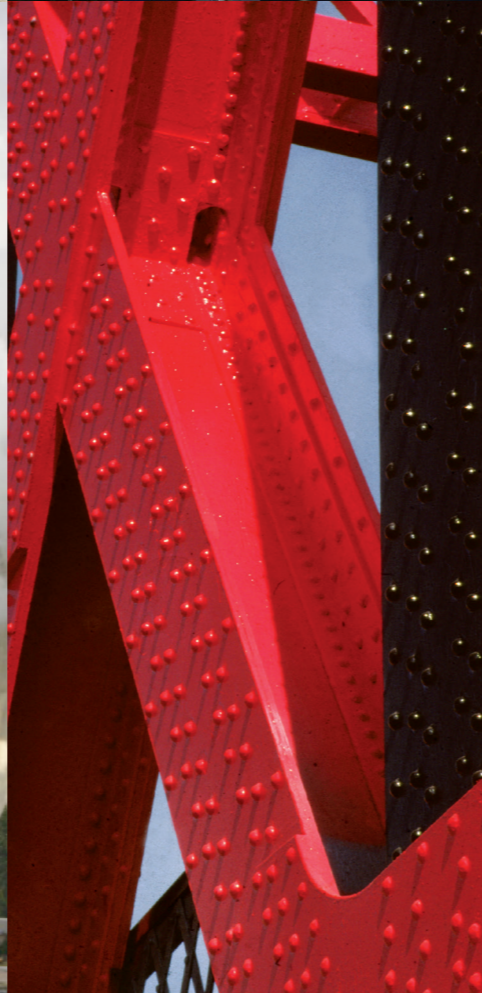

**DEVCON MAINTENANCE,
REPAIR AND OVERHAUL SYSTEMS**

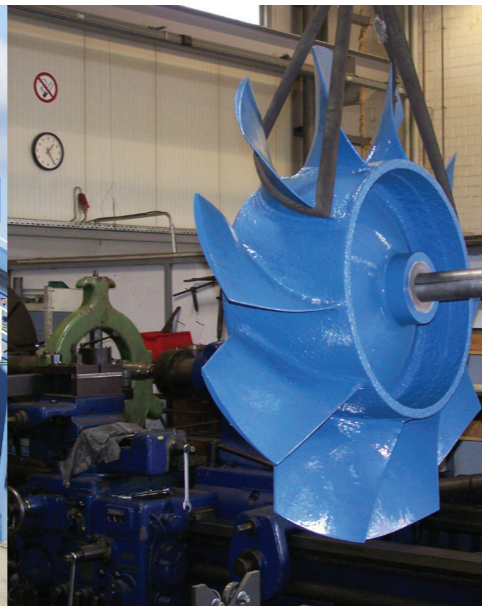

DEVCON MAINTENANCE, REPAIR AND OVERHAUL SYSTEMS

Devcon products are the result of 50 years' experience, all developed to be easily and safely applied by your own personnel. They provide effective solutions throughout industry and even at sea. They are used extensively in plant facilities and equipment MRO, for emergency repairs and in OEM applications, particularly in the heavy engineering, automotive, construction and shipping industry sectors.

DEVCON PRODUCTS AND SYSTEMS INCLUDE:

- Metal filled epoxy alternatives to welding and brazing
- Systems for rubber and conveyor belt repairs
- Repairs to all different metals, plastics and ceramics
- Protective coatings to reduce abrasion
- High strength adhesives for industrial bonding
- Easy to use systems for floor repairs and protection
- Fast and precise tooling and mould making resins

DEVCON SOLUTIONS:

- Extend the life of your machinery
- Reduce and prevent costly downtime
- Increase your productivity
- Make prototyping easy
- Make safe and secure bonded assemblies
- Have local technical advice, support and training
- Available from an extensive distribution network

BROCHURE CONTENTS

- 4 Metal Filled Epoxy Systems
- 6 Wear & Abrasion Systems
- 9 Epoxy Flooring Systems
- 11 Flexible Urethane Maintenance and Repair Systems
- 12 Flexane Ancillary Materials
- 12 Epoxy Adhesive Systems
- 14 Methacrylate Systems
- 15 Adhesive Systems Accessories
- 15 Dispensing and Mixing Equipment

DEVCON: THE WORLDWIDE TECHNOLOGY AND MARKET LEADERS

Devcon are known throughout the world as the technology and market leaders in products for plant maintenance, repair and overhaul operations, including all types of industrial high strength bonding applications.

This brochure shows only a small and representative selection from the extensive Devcon range – for further information, technical support and training for your personnel, please visit our website, contact our distributors or the Devcon Technical Service Centres. Our dedicated and practically experienced technical service team will be pleased to assist you.

DEVCON METAL FILLED EPOXY SYSTEMS

Devcon metal filled epoxy putty systems make fast, economic and fully compatible repairs to different metallic components including steel, stainless steel, aluminium and bronze etc, reducing downtime and returning you to full operation within hours.

Devcon metal filled epoxy liquid systems have excellent flow properties allowing accurate and detailed reproduction over existing components.

They cure at room temperatures, have excellent chemical resistance and include products for dry operating temperatures of up to 175°C and for application down to 4°C.

DEVCON BRONZE PUTTY (BR)

Bronze filled epoxy putty for repairing bronze and brass machinery parts

- Used on castings, brushes and shafts when brazing is not possible
- Easily machined, tapped and drilled
- Dry service temperature up to 120°C

Size 500 g
Product Code 10261

DEVCON STAINLESS STEEL PUTTY (ST)

Stainless steel filled epoxy putty for patching, repairing and rebuilding stainless steel and non ferrous equipment

- Used for rust free patching and rebuilding
- Bonds to ferrous and non-ferrous metals
- Dry service temperature up to 120°C

Size 500 g
Product Code 10271

DEVCON TITANIUM PUTTY (HP)

Smooth, titanium reinforced epoxy putty for making repairs that can be precision machined

- Provides abrasion and chemical resistant surfaces
- Repairs and rebuilds worn pumps, shafts, impellers etc.
- Dry service temperature up to 175°C

Size 500 g 1 kg
Product Code 10761 10765

DEVCON PLASTIC STEEL PUTTY (A)

The original metal filled and machinable Devcon epoxy putty. Replaces welding for hundreds of routine applications

- Bonds to most materials with a tough finish
- Excellent resistance to oil, petrol, water and many other chemicals
- Dry service temperature up to 120°C

Size 500 g 1 kg
Product Code 10112 10115

DEVCON ALUMINIUM PUTTY (F)

Aluminium filled epoxy putty for cost effective repairs to aluminium castings, components and equipment

- Bonds to other metals and most rigid plastics
- Resistant to CFCs and many other chemicals
- Dry service temperature up to 120°C

Size 500 g
Product Code 10611

DEVCON PLASTIC STEEL 5 MIN PUTTY (SF)

Fast curing, steel filled epoxy putty for permanent emergency repairs and use at low temperatures

- Machinable and ready for service in 1 hour
- Rapid curing and low temperature use
- Dry service temperature up to 90°C

Size 500 g
Product Code 10241

DEVCON ALUMINIUM LIQUID (F-2)

Aluminium filled pourable epoxy liquid for making moulds and reproducing the fine details of patterns and fixings

- Cost effective moulds
- Good thermal conductivity
- Dry service temperature up to 120°C

Size 500 g
Product Code 10711

DEVCON PLASTIC STEEL LIQUID (B)

Provides accurate detailing reproduction in the making of moulds, light gauge forming dies etc.

- Fast curing and self levelling for cost effective moulds and dies
- Machinable to fine tolerances
- Dry service temperature up to 120°C

Size 500 g
Product Code 10211



DEVCON WEAR & ABRASION SYSTEMS

Devcon epoxy systems make fast, durable repairs to almost all types of plant and machinery, bonding to most materials including metals, ceramics and concrete. Devcon epoxy systems are easy to use, in many cases fast curing and have high performance characteristics giving a very cost effective way of improving performance and extending useful service life. Devcon epoxy systems can be used to make fast, durable repairs to almost all types of plant and machinery.

DEVCON WET SURFACE REPAIR PUTTY (UW)

Water resistant putty for repairing, patching and rebuilding equipment in underwater or habitually wet environments

- Penetrates moisture, eliminates the need to dry substrates thoroughly before repairs
- Can be applied and cures down to 4°C
- Dry service temperature up to 90°C

Size 500 g
Product Code 11801

DEVCON SPRAYABLE CERAMIC

A reinforced, sprayable, ceramic epoxy, which is chemically resistant, for surfaces which require an exceptionally smooth finish

- Very low friction surface
- Protects tanks, pumps, blades, valves etc exposed to erosion and corrosion
- Dry service temperature up to 150°C

Size 10 kg Blue
Product Code 15411

DEVCON BRUSHABLE CERAMIC

Low viscosity, ceramic filled, brushable epoxy that provides a smooth, protective barrier against abrasion, erosion and chemical attack

- Low friction surface for operating efficiency
- Rebuilds and seals heat exchanger tubes and protects pump casings and flange faces etc.
- Dry service temperature up to 175°C

Size 500 g Blue 500 g Red 5 kg Blue
Product Code 11762 11752 11763

DEVCON WEAR RESISTANT PUTTY (WR-2)

Smooth, non-rusting, multi-purpose, ceramic filled epoxy 'putty' for repairs requiring very smooth, high-slip finishes, such as lathe beds etc.

- Prevents abrasion and erosion of metal components
- Repairs metals, concrete and even some rigid plastics
- Dry service temperature up to 120°C

Size 500 g
Product Code 11411

DEVCON WEAR RESISTANT LIQUID (WR)

Ceramic filled epoxy liquid for casting metal forming dies and tracers etc. where exceptional durability is required

- Low friction with outstanding wear resistance
- Non shrink for accurate reproduction of critical details
- Dry service temperature up to 120°C

Size 500 g
Product Code 11211

DEVCON CERAMIC REPAIR PUTTY

Trowelable, ceramic filled epoxy putty for rebuilding worn or damaged equipment, particularly in abrasive environments

- Excellent erosion and corrosion resistance
- Rebuilds casings, plates, materials handling, chutes and hoppers, plus valves etc.
- Dry service temperature up to 175°C

Size 3 lb
Product Code 11700

DEVCON WEAR GUARD FINE LOAD

Ceramic filled, trowel applied epoxy for use in situations where small particle abrasion is present

- Fine detail can be achieved with high performance maintained
- Ideal for applications where small particles or dust are the abrasive media being transported

Size 30 lb
Product Code 11470

WEAR GUARD HIGH TEMPERATURE 450

Special high performance Epoxy resin matrix which encapsulates the ceramic bead and provides high temperature resistance

- Exceptional abrasion performance at temperatures up to 230°C
- Non shrink for accurate reproduction of critical details

Size 30 lb
Product Code 11480

DEVCON DFENSE BLOK

Our latest technology, a blend of ceramic beads and impact modifier for the highest performance in abrasion and especially impact situations

- Superior sliding abrasion resistance
- Withstands high impact conditions
- Non-sagging on vertical or overhead surfaces

Size 30 lb
Product Code 11330

DEVCON DEFENSE BLOK FAST CURE

When time is of the essence this Fast Cure version of DFence Blok gives a rapid return to service but without compromising on performance

- Faster curing version of DFence Blok
- Allows equipment to be returned to service in 2 hours
- Less prone to unexpected fractures

Size 9 lb
Product Code 11350

DEVCON DFENSE BLOK QUICK PATCH

When there is a failure in your equipment and a shutdown is out of the question the Quick Patch is our fastest curing solution to keep the process running until the next shutdown

- For use in emergency situations where plant cannot be taken out of service
- Fast cure but still with high performance

Size 1 lb
Product Code 11320


DFENSE BLOK SURFACE WETTING AGENT (SWA)

The primer for our DFence Blok and DFence Blok Fast Cure, SWA ensures the best possible adhesion to your substrate. Overcoated directly after application the use of SWA adds little time to your application but vastly enhances performance

- Zero wait time before applying DFence Blok
- Allows superior adhesion to all surfaces
- Orange color for easy visual inspection

Size 1 lb
Product Code 11340



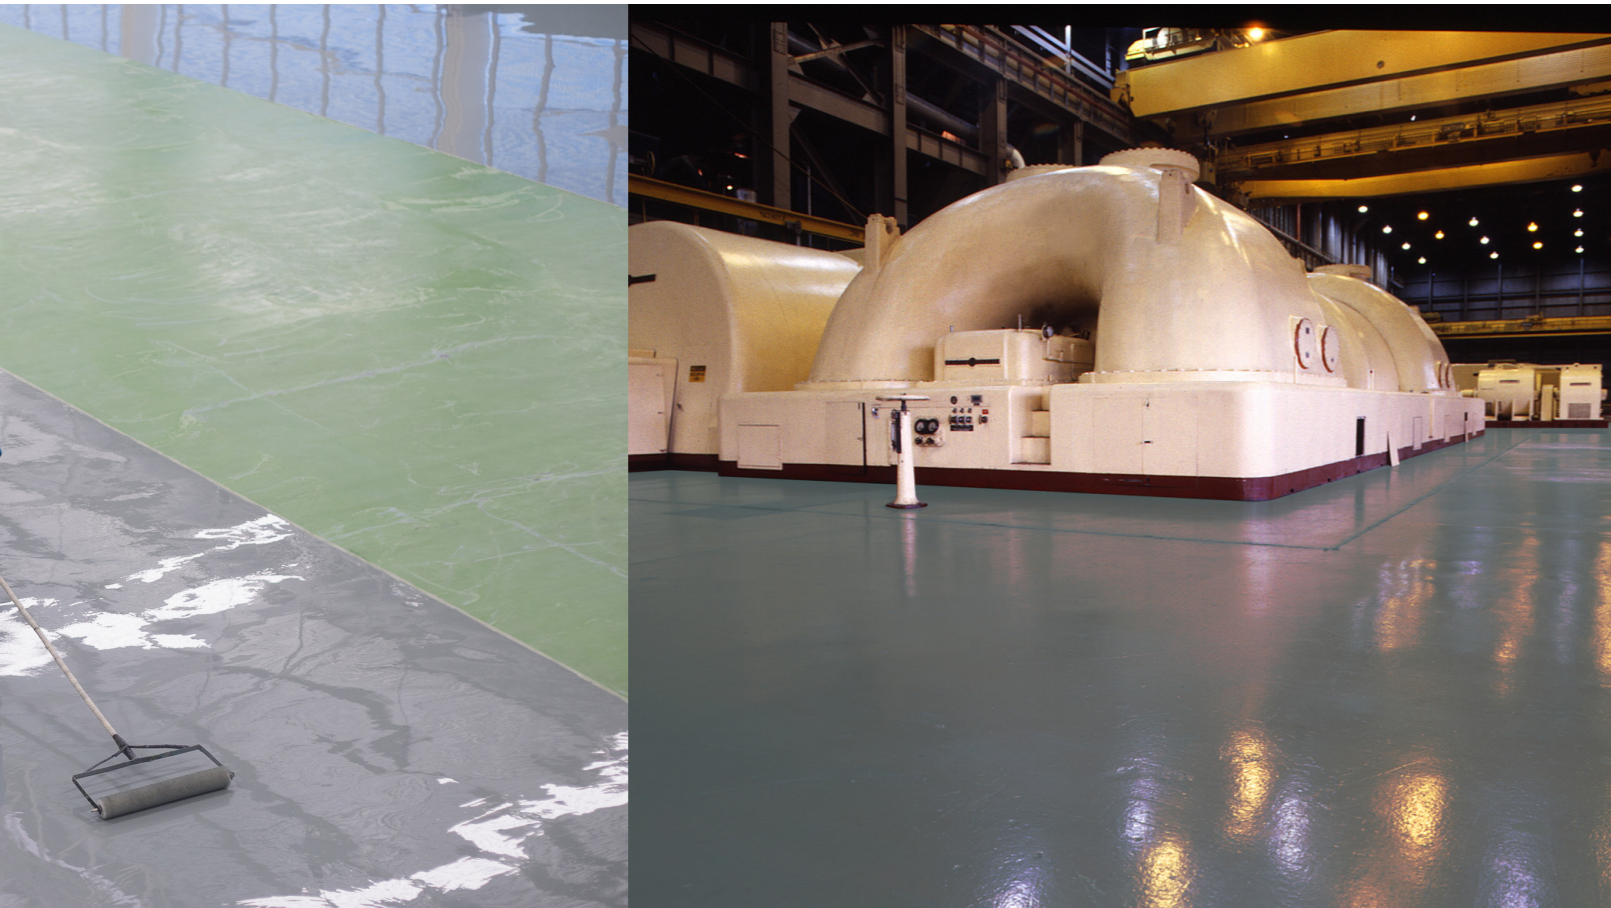

DEVCON EPOXY FLOORING SYSTEMS

Easily applied by plant maintenance teams, Devcon epoxy flooring systems provide high strength, fast setting chemically resistant repairs and can help to solve slip problems. Suitable for floors, walkways, ramps, platforms, loading docks etc.

DEVCON FLOOR PATCH

Multi purpose concrete patching compound with a compressive strength of 55 MPa which is 2-3 times the typical strength of conventional concrete

- Chemically resistant
- Bonds to new and old concrete
- Ready to walk on after 8 hours

Size	5 kg
Product Code	13101

DEVCON FLOOR GRIP

Heavy duty epoxy coating with silicone carbide granules producing an exceptionally tough non-slip surface

- Extremely durable system with weather resistant aggregate
- Bonds to metals, concrete and wood
- Cures as low as +5°C

Size	10 kg
Product Code	13090

DEVCON EPOXY SEALER 100

Solvent free, epoxy coating system for sealing and waterproofing concrete, masonry and wood surfaces

- Bonds to wet surfaces and can be used as a primer on damp concrete for other systems
- Durable translucent floor coating ideally used as a primer coat for our other floor coatings

Size	5 kg
Product Code	12540

DEVCON ULTRA QUARTZ

High strength, high build solution with excellent chemical resistance where there is no time for concrete to be laid and cure

- Ultraquartz can both rebuild concrete and provide a protective coating at the same time
- Ideal for high traffic areas or situations where standard concrete alone will be subject to by chemical exposure


Size	35 lb
Product Code	13550

DEVCON EPOXY COAT 7000 AR

Solvent free, chemically resistant, epoxy coating with exceptional performance against concentrated (98%) Sulphuric Acid.

- It can be applied to metal or concrete for secondary containment of various high strength acids
- Easy to apply by roller

Size	7.56 kg
Product Code	12750

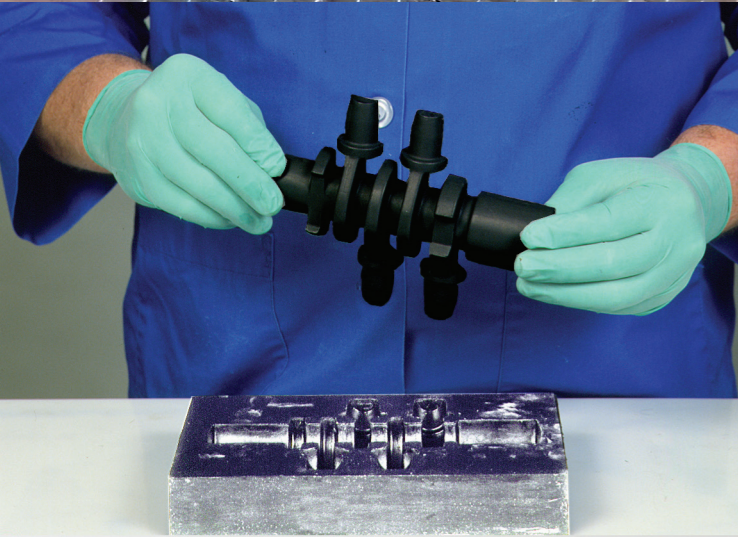

DEVCON FLEXIBLE URETHANE MAINTENANCE AND REPAIR

Devcon Flexane® repair products are all flexible, urethane resin based materials, available in a range of hardness' and as either liquid or putty. In liquid form they are castable, very low shrink compounds for producing new, custom or discontinued rubber parts and flexible moulds. In putty form they may be used to repair worn or damaged rubber equipment, to form protective coatings as linings in extremely abrasive environments, or for repairs subject to wear, impact or vibration.

Devcon Flexane® products bond to metal, rubber, concrete, fibreglass, wood and many other materials.* They are all easily applied by trowel or brush and cure quickly to form a 'rubber-like' compound with exceptional tear strength and abrasion resistance.

DEVCON FLEXANE® HP BRUSHABLE

High performance brushable system with excellent impact, wear and chemical resistance

- Excellent flexibility, tear and tensile strengths
- Cures to a medium hard 'rubber-like' compound, (Shore A Hardness 86)

Size	500 g
Product Code	15350

DEVCON FLEXANE® GFR 40 (Flame Retardant)

Elastomeric system to produce flame retardant in-situ gaskets. Pourable and self levelling properties also make it ideal for casting and moulding

- Battleship grey colour ideal for marine and naval applications
- NATO approved for military use

Size	3 kg
Product Code	96000

DEVCON FLEXANE® GP PUTTY

Trowelable putty for repairing, coating and lining equipment and components exposed to impact, abrasion, vibration and movement etc.

- Excellent abrasion and impact resistant
- Bonds to most common substrates
- Cures to a medium hard rubber-like compound (Shore A Hardness 87)

Size	500 g
Product Code	15821

DEVCON FLEXANE® 60/80/94

Flexane liquid products are available in three different grades to cover a variety of applications with different hardness requirements

- Good abrasion and wear resistance
- Self levelling

	Flexane 60	Flexane 80	Flexane 94
Size	500 g	500 g 5 kg	500 g 5 kg
Product Code	15200	15800 15810	15250 15260
Flexibility	High	Medium	Low

DEVCON R-FLEX BELT REPAIR KIT

A brand new belt repair solution, R-Flex is a self-leveling urethane kit for repairing holes, tears and gouges in heavy weight rubber conveyor belts. It can also be used to cover metal staples and crimps used for more extensive belt repairs

- A self-levelling liquid during the application which then becomes a non-sag gel in 4 minutes, (depending on temperature conditions)
- Very high adhesion demonstrated as substrate failure when conducting bond testing

Size	1.5 lb	4 lb
Product Code	15565	15550

*with suitable primers from our range

DEVCON FLEXANE ANCILLARY MATERIALS

Devcon provide a range of ancillary materials and equipment to support the efficient application, use and performance of the Flexane urethane repair systems.

DEVCON FLEXANE® PRIMERS

Ensures the optimum adhesion of Devcon Flexane® urethane products

- Use FL-10 for all types of metals
- Use FL-20 for rubber, wood, FRP and concrete

Size	FL-10 112 g	FL-20 112 g
Product Code	15980	15985



DEVCON EPOXY ADHESIVE SYSTEMS

Devcon provide the most technically advanced epoxy adhesives, in a range of different grades with different viscosities, pot lives, open times and cure times, for many industrial bonding applications. These tough, fast curing systems also have excellent chemical resistance. Innovative packaging and dispensing systems are also supplied in a wide range of different packaging and sizes to suit all types of applications.

DEVCON 1 MINUTE EPOXY GEL

Lightning fast curing epoxy adhesive gel for filling gaps, cracks and surface defects

- Bonds in one minute or less
- Non sag for use in vertical and overhead applications
- Fixture time 60 seconds

Cartidge Size	50 ml
Product Code	14277

DEVCON 5 MINUTE EPOXY

Rapid curing multi-purpose epoxy adhesive and encapsulating resin

- Bonds rigid, durable substrates such as metal, glass, ceramics, concrete and wood in five minutes or less
- Fixture time 10-15 minutes

Size	Product Code
28 g Dev-Tube	14251
70 g Twin-Tube	14210
50 ml Cartridge	14270
400 ml Cartridge	14272

DEVCON 2 TON CLEAR EPOXY

Extremely strong, water resistant, medium fast cure epoxy adhesive and surface filler

- Achieves a strong, rigid bond on metals, ceramics, wood, concrete, glass etc
- Non shrink with good impact strength
- Available in a wide range of different packaging
- Fixture time 30-35 minutes

Size	50 ml	200 ml
Product Code	14260	20222

Fixture Time:

The time after the surfaces have been joined until they will support a 1kg weight on a 12.5mm x 25mm wide overlap joint.



DEVCON METHACRYLATE SYSTEMS

Devcon Methacrylate Adhesives are formulated for use with today's hard to bond engineered plastics, advanced composites, exotic metals, and other difficult substrates. Mixing as they are dispensed, they produce tough, flexible adhesive bonds with little or no surface preparation. They cure rapidly at room temperatures, and provide exceptional physical strengths and environmental resistance. Fully recyclable and solvent free, they can also help to reduce VOC.

DEVCON DEWELD 530

Rapid curing, multi-purpose, tough, structural methacrylate adhesive that produces high strength load bearing bonds to engineered plastics, metacermics and many other materials

- Minimal surface preparation
- Resistant to weathering, moisture and wide variations in temperature
- Fixture time 12-15 minutes

Cartridge Size 50 ml
Product Code 20500

DEVCON DEWELD 531

Methacrylate adhesive for 'difficult to bond' engineered plastics such as nylon based alloys, epoxy composites, modified polyesters, many other plastics and various other materials etc.

- Superior bond strength, durability and impact resistance
- Excellent environmental and chemical resistance
- Fixture time 30-35 minutes

Cartridge Size 50 ml
Product Code 21500

DEVCON ZIP PATCH REPAIR KIT

Easy to use waterproof adhesive patching kit. Hardens in minutes at room temperatures and suitable for a wide range of applications

- Permanently waterproof field repairs
- Tough and durable when cured
- Bonds to all common substrates

Cartridge Size 1 Patch Kit
Product Code 11500

Fixture Time:
The time after the surfaces have been joined until they will support a 1kg weight on a 12.5mm x 25mm wide overlap joint.



DEVCON SYSTEM ACCESSORIES

Devcon system accessories are designed to complement the product range and provide even more efficient or increased performance with improved surface conditioning, or preparation of substrates or for use in adverse conditions.

DEVCON SILITE

The Silite White and Clear provide an easy to apply Silicone polymer for use in a range of sealing and filling applications. Adhesion to most substrates is exceptional

- Applicable to horizontal and vertical surfaces this non sag formula makes Devcon Silite a versatile solution for a number of repair situations

Size 310 ml Clear 310 ml White
Product Code 17150 17140

DEVCON LIQUID RELEASE AGENT

Silicone release agent prevents Devcon's epoxy and urethane products from sticking to patterns or mould surfaces

- Ensures a high gloss finish on cast Devcon resin surfaces

Size 473 ml
Product Code 19600

DEVCON DISPENSING AND MIXING EQUIPMENT

Devcon provide a range of application guns and static mixing nozzles for dispensing and mixing. They can eliminate pre-mixing and greatly reduce waste, speed up application, guarantee correct ratios and dramatically reduce clean up – collectively these can also reduce your overall production or maintenance costs.

DEVCON STATIC MIXING NOZZLES

Static mixing nozzles for mixing Devcon two component products supplied in cartridges, directly on application from the gun

Size/Ratio	Product Code
MA 6.3-21/50 ml	14283
MA 6.3-12S/50ml* (1 min Epoxy Gel)	29991
MC 10-18/200-400 ml	29999

DEVCON DISPENSING GUNS

Specially developed application guns for dispensing the Devcon products that are supplied in cartridges

Cartridge Size	Product Code
50 ml	20015
200/250 ml	14281
400 ml	20020

**ITW Performance Polymers
North America**

30 Endicott Street
Danvers
MA 01923
T. +1 978-777-1100
F. (978) 774-0516
E: info@itwpp.com
www.itwperformancepolymers.com

**ITW Performance Polymers
North America**

130 Commerce Drive
Montgomeryville, PA 18936
T: 215-855-8450
E: customerservice.na@itwpp.com
www.itwperformancepolymers.com

**ITW Performance Polymers
Europe**

Bay 150
Shannon Industrial Estate
Shannon, County Clare
Ireland
T. +353 61 771 500
E: customerservice.shannon@itwpp.com
www.itwperformancepolymers.com

**ITW Performance Polymers
Europe**

Gasvaerksvej 46
9000 Aalborg
Denmark
T: +45 9816 7011
E: customerservice.aalborg@itwpp.com
www.itwperformancepolymers.com

ITW Polymers Asia

10,27F, Xingyuan Building
No. 418, Guiping Rd.
Cao He Jing Hi-Tech Park
Shanghai
China 200233
T. 021-54261212
www.itwppchina.com

30-32 Enoki-cho,
Suita, Osaka 564-0053
Japan
T. +81-6-6330-7118
www.itwppjapan.com

13th floor, PAX Tower, Unit B
231-13, Nonhyeon-Dong, Gangnam-Gu
Seoul, Korea 135-010
T. +82-2-2088-3560
www.itwppkorea.com

ITW PP&F

Brazil
Rua Antonio Felamingo, 430
Macuco, Valinhos, SP 13279-452
T: +55 19 2138-7600
www.itwppf.com.br

